



PROTECTED BY
c-pod®
.....



CONTENTS

C-pod mini

- 5 C-pod mini Package

C-pod Base

- 6 C-pod Base Package
- 7 Intrusion Detectors
- 8 Environment Detectors
- 9 Remote control
- 10 Cables and Connectors
- 11 Siren
- 12 External antennas

C-pod ELite

- 13 C-pod ELite Start Kit




C-pod Mini 1703-111

The C-pod mini package is the start kit that includes everything that is needed to install the C-pod main unit.

Included in the box:

C-pod mini tracker

- Battery of high quality (2x AAA lithium batteries)
- Dual-Lock attachment (Double sided tape with burdock)
- Shell to the device
- Integrated SIM card with free traffic
- Allen Key (To open the battery cover)
- Yearly subscription

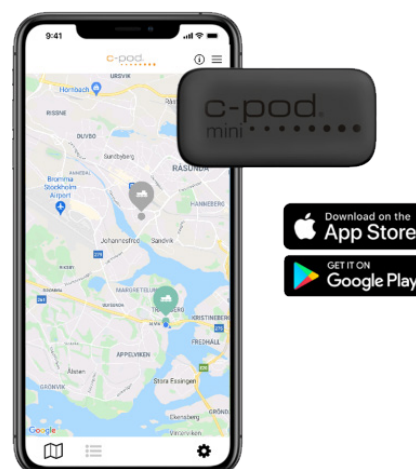

C-pod mini is a Swedish tracker that keeps track of your boat, boat engine or jet ski.

- ✓ No installation
- ✓ Easy to hide
- ✓ User-friendly app
- ✓ Affordable
- ✓ Possibility of lower insurance premium
- ✓ Quick alarms
- ✓ Share with family and friends



Technical specification

Weight: 45 gram with LiFePO4-batteries
 Bluetooth: Yes, BLE (Bluetooth Low Energy)
 NB-IoT LTE, Band 8 and 20 Accelerometer:
 3 axes, integrated IC Thermometer: -40 <=>
 +60 C
 CE: Yes (RoHS+CE)
 App for phone and tables: Yes (iPhone,
 Android)
 History (see positions back in time): Yes, All
 data is saved encrypted IP-standard: Dust
 and waterproof

Technical specification

External cables: No, Not required External
 antenna: No, Antennas are internal
 Measure Size: L x B x D (mm)
 70 x 35 x 20
 GPS: 50-channel receiver
 Accuracy (GPS): < 2,5 meter Geographical
 coverage: Scandinavia, Finland and Baltics.
 Batteries: 2 x AAA LiFePO4
 Accepted temperature: - 40 degrees C to +
 60 degrees C

C-pod

C-pod Base Package Part no: P1703-141

The C-pod Base package is the start kit that includes everything that is needed to install the C-pod main unit.

Included in the box:

- C-pod main unit
- Fastener for the main unit
- GPS antenna
- Cellular (GSM) network antenna
- Magnetic intrusion sensor
- Power cable
- Activation button
- Hook-and-loop fastener for the GPS antenna
- Manual



C-pod Features

- ✓ Flexible system
The C-pod system is designed to be flexible. All sensors and detectors can be fitted to a Hub allowing the installation to grow and up to 6 sensors can be installed on each alarm loop.
- ✓ Geofence alarm
The C-pod continuously monitors the boat's position through the built-in GPS and sends an alarm if it moves more than 200m
- ✓ Battery disconnect alarm
If the external power is cut the C-pod sends an alarm before converting to the internal back-up battery
- ✓ Battery level warning
The user can select a battery voltage threshold to get a warning when it is time to charge the boat's batteries or to detect when shore power is not available
- ✓ Communication warning
The system actively monitors each C-pod unit every hour. If the unit goes offline a notification is sent to the user. The user is thus assured that the system is fully operational.
- ✓ Sensor alarms
Possibility to add up to 12 sensors to detect intrusion, theft, water, smoke or other hazards onboard.
- ✓ Remote equipment management
Possibility to add a relay to turn on/off electronics remotely.



Technical specification

Dimensions (WxHxD): 180x110x40mm
Weight: 299g
Supply voltage: 10 – 30V DC
GSM quadband modem
(850, 900, 1800 and 1900 MHz)
12 Channel GPS, -152 dBm sensitivity

2000mAh Li-Ion backup battery
2 sensor loops with up to 6 daisy-chained sensors each
1 output for siren or relay (remote switching)
Average power consumption 25 – 30 mA
Operating temperature -15° to 55°C / 5° to 131°F
CE & FCC approved

Intrusion Detectors



Motion Detector 12V (PIR), Part no: P1703-404 or P1703-405

The industry's best detection accuracy, false alarm immunity and ultimate long term reliability with Fuzzy Logic algorithm (TMR), and state-of-the-art 3D cylindrical optics.

Features

- White light and UV protection
- Easy to install no vertical adjustment
- Sealed optics - Protects from insects and air currents
- Digital temperature compensation

Technical specification

Operating Voltage: 9 to 16 VDC
 Standby Current Drain: 8 mA at 12 VDC
 Sensitivity: 2 motion events
 Operating temperature: -10°C to 50°C
 Dimensions (LxWxH): 94,5 x 63,5 x 49,0mm

Available in:



P1703-404
 Connector: USB
 Length: 7m
 Colour: White



P1703-405
 Connector: M8
 Length: 3m
 Colour: White



Magnetic Detector 12-24V (PIR), Part no: P1703-435 or P1703-436

Magnetic sensor for door or hatch. Will notify you of break-in or if you have forgotten to close a door or a hatch after your boating session.

Features

- Surface Mount Magnetic Contact
- Recessed mounting holes make for clean-looking installations.
- Designed to prevent moisture from entering and causing false alarms.
- Neat and tidy design

Technical specification

Operating Voltage: 9 to 25 VDC
 Max operating gap: 15 mm
 Dimensions (LxWxH): 50,8 x 14 x 9,53mm

Available in:



P1703-435
 Connector: USB
 Length: 6m
 Colour: White



P1703-436
 Connector: M8
 Length: 3m
 Colour: White



Safety loop 12-24V, Part no: P1703-451 or P1703-454

The Safety loop is a simple yet effective sensor for protecting outboard engines, tenders or Jet Skis from theft. Fasten the loop inside the engine or to your valuable belonging, if the loop is broken an alarm will go off immediately.

Features

- Two split cable connected with phono contact
- Tamper proof

Technical specification

Operating Voltage: 5 to 30 VDC
 Operating temperature: -40°C to 70°C

Available in:



P1703-451
 Connector: USB
 Length: 5,5m
 Colour: Black



P1703-454
 Connector: M8
 Length: 7,5m
 Colour: Black



Environment Detectors



Water Level Sensor 12V, Part no: P1703-442 or P1703-441

Will notify immediately if your boat has reached a critical water level. Reasons vary but heavy rain and bilge pump malfunctions are most common.

Features

- Will Detect Any Conductive Non-Flammable Liquid
- Automatic Reset

Technical specification

Operating Voltage: 12 or 24 VDC
Dimensions (LxWxH): 63,5 x 13,2 x 13,97mm

Available in:

	P1703-442 Connector: USB Length: 7m Colour: White		P1703-441 Connector: M8 Length: 7m Colour: White
---	--	---	---



Smoke Detector 12V, Part no: P1703-452 or P1703-453

The smoke and heat detector is designed to respond to a wide spectrum of fires and ease installation. The multisensors use Advanced Photoelectric Technology in conjunction with the fixed temperature heat sensor to further extend its capabilities as a smoke detector. Every unit is individually tested and calibrated to ensure high reliability and prevent false alarms.

Features

- Advanced photoelectric smoke sensing technology
- Highly immune to false alarms
- Dual LEDs for 360° visibility
- Easy installation and maintenance

Technical specification

Operating Voltage: 9 or 24 VDC
Detection Range: 100 m² (smoke) 50m² (heat)
Operating temperature: -10°C to 50°C
Dimensions (D x H): 10mm x 46mm

Available in:

	P1703-452 Connector: USB Length: 7m Colour: White		P1703-453 Connector: M8 Length: 3m Colour: White
---	--	---	---



Smoke Detector 24V, Part no: P1703-457 or P1703-458

The smoke and heat detector is designed to respond to a wide spectrum of fires and ease installation. The multisensors use Advanced Photoelectric Technology in conjunction with the fixed temperature heat sensor to further extend its capabilities as a smoke detector. Every unit is individually tested and calibrated to ensure high reliability and prevent false alarms.

Features

- Advanced photoelectric smoke sensing technology
- Highly immune to false alarms
- Dual LEDs for 360° visibility
- Easy installation and maintenance

Technical specification

Operating Voltage: 9 or 24 VDC
Detection Range: 100 m² (smoke) 50m² (heat)
Operating temperature: -10°C to 50°C
Dimensions (D x H): 10mm x 46mm

Available in:

	P1703-457 Connector: USB Length: 7m Colour: White		P1703-458 Connector: M8 Length: 3m Colour: White
---	--	---	---



Low Temperature Sensor 5°C, to 48V, Part no: P1703-447 or P1703-448

The temperature Power Sensor (TPS) is the high performance control type thermostat equivalent to the performance of electronic thermostat. The sensors are pre-set with a temperature limit. When the ambient temperature goes below the trip temperature limit, the switch configuration will change.



Features

- Fixed Temperature Sensors 5° C
- Easily mounted with one screw
- Automatically reset

Technical specification

Maximum Temperature: 64° C / 147° F

Activation Temperature:

Nom. 5° C (41.0° F) Max. 9° C (48° F) Min. 1° C (34° F)

Tolerance:

+/- 4° C (+/- 7.2° F)

Dimensions (LxWxH):

40,0 x 1,25 x 0,64mm

Available in:



P1703-447

Connector: USB

Length: 7m

Colour: White



P1703-448

Connector: M8

Length: 3m

Colour: White

Remote control

Relay, Part no: P1703-411 or P1703-412

The relay is used to switch on/off onboard equipment remotely. Turn on a heater, light or the fridge from a distance!



Features

- Small size, heavy duty.
- Low contacts voltage drop (<3mV/A), reduce circuit consumption and noise.
- Contact structure, performance reliable, with plug-in pins, handle with ease.

Technical specification

Operating Voltage: 12V or 24V

Switching voltage: 14 VDC or 28 VDC

Switching current: 30 A or 10 A

Operating temperature: -40°C to 80°C

Dimensions (LxWxH): 28 x 28 x 53mm

Available in:



Connector: USB

Length: 5m

Colour: Black



REMOTE CONTROL

Cables and Connectors



Connection Kit (USB-M8, 5m & Hub), Part no: P1703-415

Features

- Used if more than 1 sensor is used on an alarm loop.
- Includes:
 - 1 x USB-M8 cable (P1703-346)
 - 1x Hub (P1703-410)

Specification

Operating Voltage: 0 to 30 VDC
Length: 5m
Colour: White



Connection Cable USB - M8, 5 m, Part no: P1703-346

Features

- Used to connect a Hub to the C-pod

Specification

Operating Voltage: 9 to 16 VDC
Length: 5m
Colour: White



Extension Cable M8 - M8, Part no: P1703-355 or P1703-359

Features

- Used to connect two Hub's with each other.
- Necessary if more than two sensors are used on an alarm loop

Specification

Operating Voltage: 12 to 24 VDC
Length: 5m or 10m
Colour: Black or White



Hub (3 x M8) incl. End Connector, Part no: P1703-410

Features

- Used if more than 1 sensor is used on an alarm loop or if a greater distance is needed for installation.

Specification

Operating Voltage: 12 to 24 VDC
Colour: White



Siren



Siren, Part no: P1703-406

Sounds if a sensor goes off on your boat and attention will immediately be drawn to your vessel. This small siren allows it to be surface mounted in almost any location. The high IP rating allows it to be used in most environments.


Features

- High IP rating for marine environments
- Small size
- Surface mounted
- Low operatin current ~18mA

Technical specification

Operating Voltage: 9 to 28 VDC
 Sound Output: 92dB
 Protection: IP65
 Operating temperature: -25°C to 70°C
 Dimensions (DxH): 60mm x 43mm

Available in:

 Connector: USB
 Length: 7m
 Colour: White



External antennas

External GPS and GSM antenna, Part no: P1703-409

The industry's best detection accuracy, false alarm immunity and ultimate long term reliability with Fuzzy Logic algorithm (TMR), and state-of-the-art 3D cylindrical optics.



Features

- Comes in white colour
- 27 dB Gain GPS
- GSM band
- High IP rating for marine environments
- Wide temperature range

Technical specification

Length: 10m
 GPS
 Frequency: 1575.42 MHz
 Power Gain: 27 dB
 Noise figure: Max 1.8
 GSM
 Frequency: Quadband 4 dBi gain
 Overall Performance
 Operating temperature: -40°C to 85°C
 Dimensions (DxH): 64,5mm x 14mm
 Protection: IPx7

ANTENNAS



GSM Antenna, Part no: P1703-408

The industry's best detection accuracy, false alarm immunity and ultimate long term reliability with Fuzzy Logic algorithm (TMR), and state-of-the-art 3D cylindrical optics.



Features

- Comes in black colour
- Robust 90° joint antenna
- Three "snap in" positions 0-45-90°
- Gain 1,5dBi

Technical specification

Frequency: 868, 850/900/1800/1900, 2400 MHz
 Gain Average: 1.5 dBi
 Polarization: Vertical
 Operating temperature: -20°C to 60°C
 Dimensions (DxH): 9,3 x 104mm

C-pod ELite

C-pod ELite Start Kit Part no: P1703-136

The C-pod ELite Start Kit is all you need to track your asset! 12- months subscription included.

Included in the box:

- C-pod ELite unit
- Fastener for the unit (Permanent adhesive tape)
- Manual




C-pod ELite Features

- ✓ Always online
- ✓ GeoFence alarm
Immediately receive an alarm if your vehicle has moved more than 100m (109yd)
- ✓ Small
The C-pod ELite is our smallest tracker which makes it easy to hide. It is about the same size as a match box.
- ✓ Global coverage
The unit comes with a pre-fitted SIM card that has world wide coverage. There are no extra fees for roaming.

Unlimited number of alarm receivers

There are no limit to the number of people you can add to receive alarms.

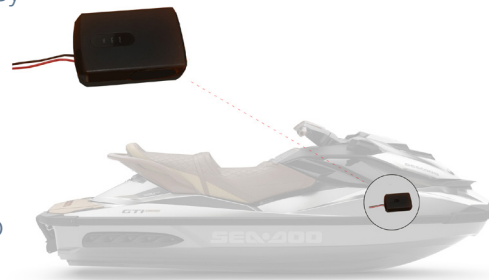


Technical specification

- Dimensions: 70 mm x 46 mm x 17,5 mm
- Weight: 62g
- GSM quad-band (850, 900, 1800 & 1900 MHz)
- GPS: 50-channel GPS receiver.
- Positioning accuracy: <2.5m
- Waterproof: IPX6

Technical specification

- Working temperature: -30 ° C ~ + 80 ° C
- Continuous reporting every 10 minutes in alarm mode
- Battery backup time in alarm mode: ~ 90 hour battery backup (reporting every 10 minutes).
- CE & FCC approved

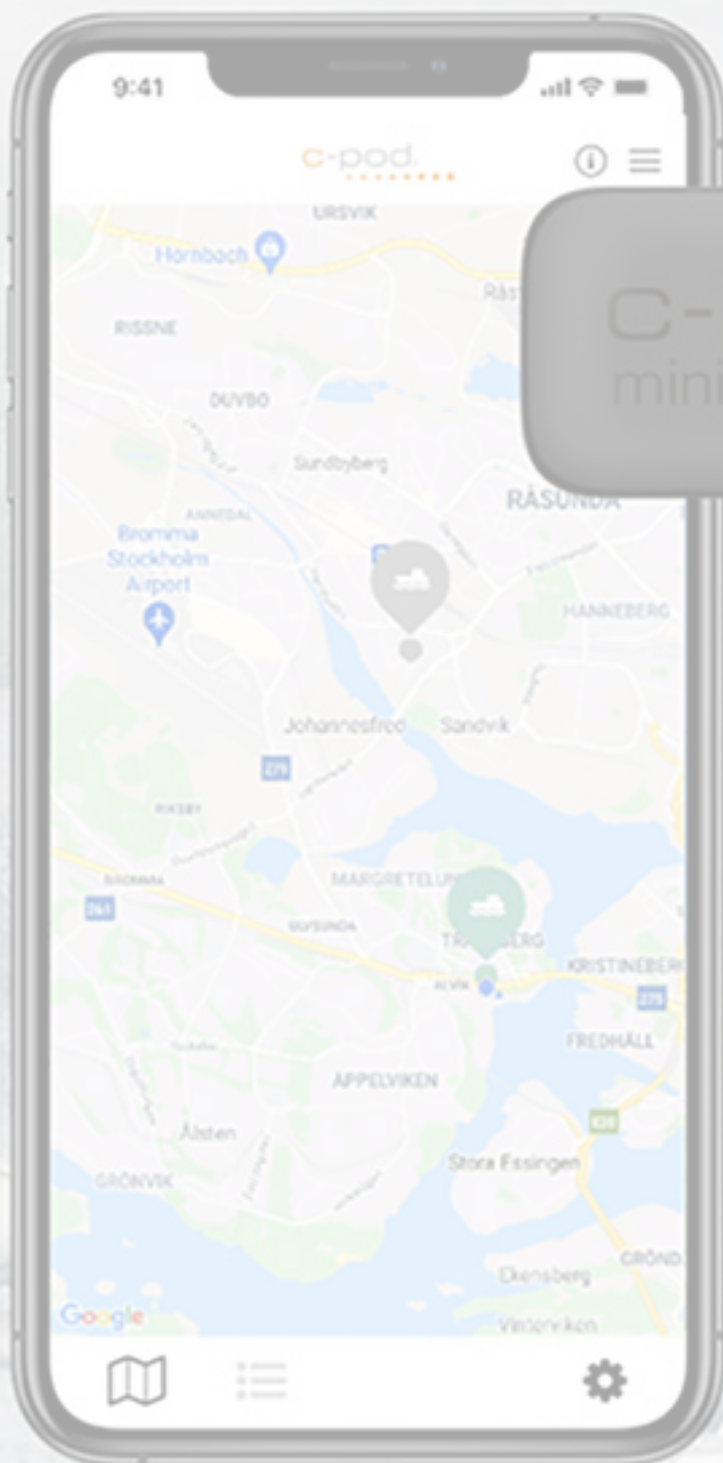



C Security Systems AB
Gustavslundsvägen 12
SE-167 51 Bromma, Sweden
Phone: +46 8 5000 10 10
Mail: sales@c-pod.com
web: www.c-pod.com